



## 350 mAh Li/SOCl<sub>2</sub> Battery



Lithium Thionyl Chloride Battery

### Features and Benefits

- Manufactured in the United States
- ISO 13485 certified manufacturing
- Stainless steel construction provides corrosion resistance
- Fully welded hermetically sealed design
- High energy density
- Flat discharge characteristics provide optimum voltage regulation
- Long shelf life
- Recommend storage from -20 to 28°C (-4 to 82°F) for optimum capacity retention

### Applications

- Heart monitors
- Biometric monitoring

**Implantable grade, long life, low rate lithium primary battery with flat discharge and reliable performance**


### Specifications

Part Number	LTC-3PN-M1
Weight	4.6 g
Dimensions	See details on back
Nominal Open Circuit Voltage	3.67V at 25°C (77°F)
Nominal Working Voltage	3.50V at 25°C (77°F) at 350 hour rate
Nominal Capacity	350 mAh to 2.5V cutoff at 25°C (77°F) at 350 hour rate
Volume	1.60 cc (0.098in <sup>3</sup> )
Operating Temperature	-40 to 95°C (-40 to 203°F)
Cell Shape	Prismatic
Case Material	Stainless steel 304L
Positive Terminals*	Nickel plated stainless steel 446
Negative Terminal*	Nickel alloy 52
Case Polarity	Negative
Options	Custom markings
	Potting
	Custom packaging
Transportation Safety	UN recommendations on transportation of dangerous goods ST/SG/AC.10/11
Battery Safety	Underwriters Laboratory recognized component

\*Custom connections such as nickel tabs or wires can be welded to the terminals to ensure ease on connections.

# 350 mAh Li/SOCl<sub>2</sub> Battery

LTC-3PN-M1 Discharge Capacity @ 25°C  
1.0 mA Rate

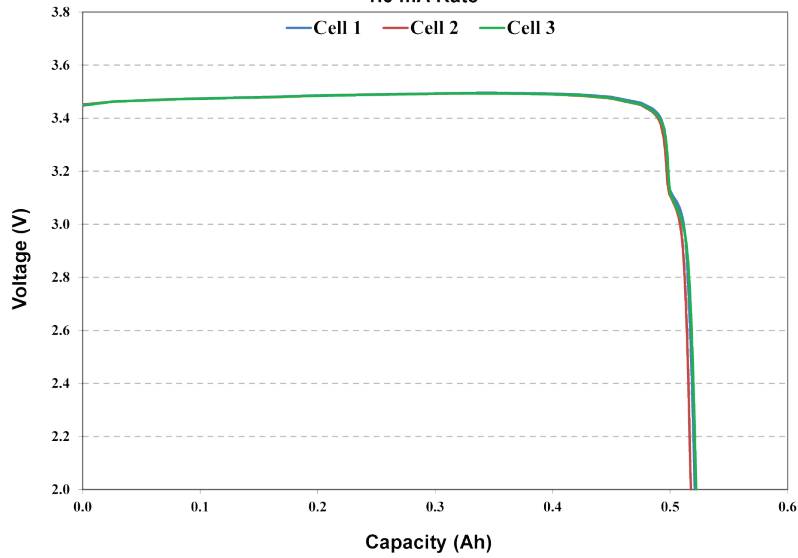

4X R.030  
[0,76mm]

