


TYPICAL PERFORMANCE: RISE TIME: (COLD: 0.06 SEC. TO 9.5 Vdc; HOT: 0.010 SEC. TO 9.5 Vdc)

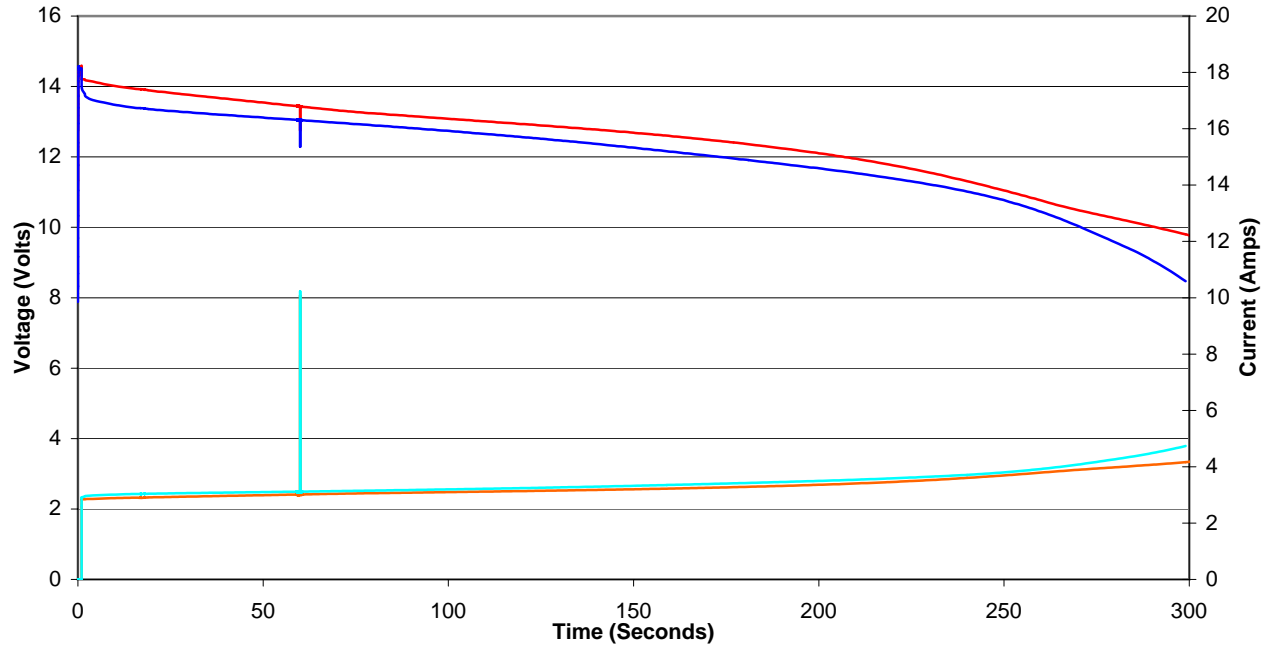

ENVIRONMENTAL REQUIREMENTS (OPERATING ONLY)

TEMPERATURE:	-45°F to +145°F
ACCELERATION:	Not applicable
VIBRATION:	Axial 2.45 Grms Radial 2.83 Grms
SHOCK:	1100 g, 15 mSec Activation
SPIN:	30 Hz, 3 Sec; 10 Hz, 20 Sec; 0 Hz to Life
OTHERS:	Not applicable

ELECTRICAL REQUIREMENTS

VOLTAGE:	16 Vdc Maximum; 9.5 Vdc Minimum
LOAD:	40 Watts Base Load With a 7 Amp Max, 0.020 Duration Pulse @ 60 Sec
RISE TIME:	0.5 Seconds
LIFE:	270 Seconds
ACTIVATION:	Shock
ACTIVATION INDICATOR:	Temperature Decal
CASE & HEADER MATERIAL:	Type 304 Stainless Steel
TERMINAL MATERIAL:	52 Fe/Ni Alloy Hot Soldered

OUTLINE CONFIGURATION:

NOMINAL WEIGHT: 0.65 Lbs
 NOMINAL VOLUME: 20.8 Cubic Inches

